



Well-Rite® Series

Built Right, Looks Right, Works Right – Well-Rite!

- ANSI/NSF Standard 61 Approved
- Welded, Stainless Steel Water Connection
- Stainless Steel Elbow
- High Quality Urethane Finish
- Controlled Action Diaphragm (CAD)
- Condensation Reducing Design
- Stainless Steel Port Diffuser
- High Quality Brass Air Stem
- Comprehensive Testing
- 5 Year Written Limited Warranty



Welded Stainless Steel Connection

Well-Rite® tanks are quickly becoming the industry standard. This tank is loaded with features that distinguish it from the competition. Solidly constructed with a welded, stainless steel connection, the Well-Rite® Series puts the “tank” in water tank. Well-Rite® tanks are distinctly designed with our patented and innovative controlled action diaphragm (“CAD”), which eliminates coatings, liners and plastic bladders.

The CAD is surrounded in a pre-pressurized atmosphere that reduces condensation and forces the diaphragm to expand and contract the same way, every time. Our patented controlled action, double diaphragm assembly completely contains drawdown water. The water chamber does not chafe on the tank wall. This unique diaphragm design is constructed with an FDA approved, high-grade butyl rubber compound. NSF certifies Well-Rite tanks as conforming to standard 61 for drinking water system components. The CAD system is anchored by our stainless steel water connection which is totally lead free, and NSF approved for the highest sanitary standard. A full flow stainless steel port diffuser directs water flow upward and outward while firmly locking the lower diaphragm in place.

Well-Rite® tanks are finished with a high quality urethane paint system that combines durable all-weather protection with a deep gloss, appliance look.

All of our quality tanks are backed by a five year written, limited warranty. Well-Rite® tanks are quality tested at four different stages on the production line. Tests include helium and high pressure tests to ensure the structural integrity of every tank.





Well-Rite® Series Models


Model #/s	Dimensions				Volume		Shipping (Box) Volume		Shipping (Box) Weight		System Connection
	Diameter		Height		gal.	liters	cu. ft.	cu. m.	lbs.	kilos	
	in.	cm.	in.	cm.							in.
WR45	16	40.64	22	55.88	14	60	3.62	0.10	28.0	12.7	1"
WR60	16	40.64	29	73.66	20	80	4.73	0.13	36.0	16.3	1"
WR80	16	40.64	34.5	87.63	26	100	5.59	0.16	41.0	18.6	1"
WR100	21	53.34	27.75	70.48	32	120	7.76	0.22	54.0	24.5	1.25"
WR120	16	40.64	42.75	108.58	33	130	6.93	0.19	49.0	22.2	1"
WR140	21	53.34	36.25	92.07	44	170	10.17	0.28	67.0	30.4	1.25"
WR200	21	53.34	48	121.92	62	240	13.64	0.38	82.0	37.2	1.25"
WR240	21	53.34	62	157.48	81	310	16.45	0.46	99.0	44.9	1.25"
WR260	26	66.04	44.5	113.03	85	325	18.69	0.52	121.0	54.9	1.25"
WR360	26	66.04	59.75	150.49	119	450	26.16	0.73	153.0	69.5	1.25"

All Models – 38 psi/2.6 bar pre-charge
 Maximum working pressure: All models- 125 psi/7.4 bar
 Factory Rated Maximum working temperature: All models – 140°F/55°C

Quick Sizing Chart

Model #/s	Total Tank Volume		Total Drawdown					
	gal.	liters	20/40		30/50		40/60	
	gal.	liters	gal.	liters	gal.	liters	gal.	liters
WR45	14	60	5.6	21.35	4.8	18.1	4.1	15.6
WR60	20	80	8.1	30.51	6.8	25.8	5.9	22.3
WR80	26	100	10.5	39.66	8.9	33.6	7.7	29.0
WR100	32	120	12.9	48.81	10.9	41.3	9.4	35.7
WR120	33	130	13.3	50.34	11.3	42.6	9.7	36.8
WR140	44	170	17.7	67.12	15.0	56.8	13.0	49.1
WR200	62	240	25.0	94.57	21.1	80.0	18.3	69.2
WR240	81	310	32.6	123.6	27.6	104.5	23.9	90.4
WR260	85	325	34.3	129.7	29.0	109.7	25.1	94.9
WR360	119	450	48.0	181.5	40.6	153.6	35.1	132.9

* Total drawdown assumes tank pre-charge set at 2 psi below cut-in pressure.
 Drawdown can be affected by many factors, including temperature, pressure, and elevation.

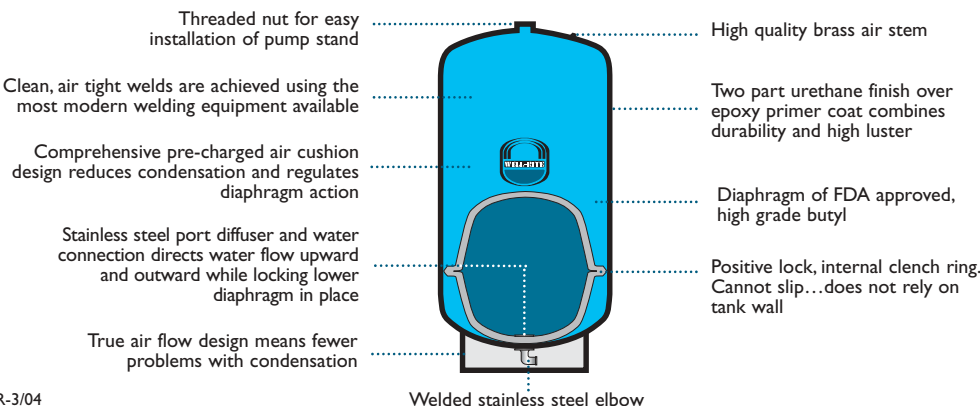

Flexcon Industries
 300 Pond Street
 Randolph, Massachusetts 02368

For More Information
 Call 1.781.986.2424
 Fax 1.781.986.2029
 www.flexconind.com